



12 Channel TR-S Panel with Optional Iris Control

Shot Control Panel

The TR-S control panel has been designed to provide comprehensive operational control for Parliaments and Legislatures as well as News, Sports and Current Affairs Studios where a significant number of stored shots are required. Direct entry of shot numbers allows rapid selection of the 900 shots for each camera.


The high visibility LCD display provides full status information for all cameras in the system. LED illuminated keys provide further clear indication of function status and camera availability. The panel is highly configurable enabling almost any combination of controls to be supported.

The TR-S optionally supports up to 16 camera channels (TR-16S) with 8 camera channels as standard (TR-8S). Multiple panels may be installed in a single system to share control between operators or control locations.

A 'Setup' function key enables quick and easy configuration of panel parameters such as panel address and display/keys brightness or contrast.

APPLICATIONS

- ▶ Parliaments and Legislatures
- ▶ News and Sports Broadcasts
- ▶ Current Affairs Studios

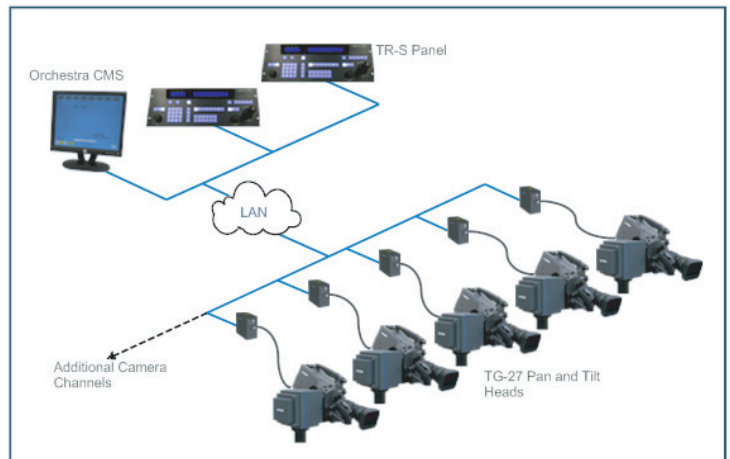

Typical Two-Panel TR-S System

FEATURES

- Control up to 16 Cameras (8 Standard)
- Clear LCD Status Display of All Cameras
- Automatic On-Air Camera Selection
- 900 Stored Shots per Camera
- Multiple Shot Sequences
- 'Setup' Function for Easy Configuration
- Supports Shotoku 'Learn Mode'

SPECIFICATIONS

Controls	3-axis Proportional Joystick for Pan, Tilt and Zoom Rotary Encoder for Focus Adjustable Fade Time Numeric Direct Shot Entry Keypad Individual Pan & Tilt Reverse Functions Dedicated Camera Selection Buttons with 'On-Air' Tallies Fade, Cut, Swoop and Stop 2 Line LCD shows This Shot, Next Shot and Status for all Cameras Controls for 3 Additional Functions
Connections	RS-422 & Ethernet camera control ports RS-232/RS-422 Automation Interface GPI In/Out Switcher Tally
Size	19" Rack mount, 4RU high
Power	100-240V AC 50/60Hz